

JE 2-100 G10 NT21

Electric - Qmax 36 m³/h - (158 USgpm) - Hmax 20 m (65 ft)

Code: 8381063385



Indicative picture of the product

Product Data

Suction port
Threaded - 2" ISO 228 (BSP)

Delivery port
Threaded - 2" ISO 228 (BSP)

Qmax
36 m³/h - 600 l/min (158 USgpm)

Hmax
20 m (65 ft)

Solids handling
17 mm (0.67 ")

Motor power
1.5 kW - 2 HP

Motor type
IEC standard
Winding for inverters
Cast iron frame

Motor brand
WEG W22 Premium

Weight
40 kg (88 lb)

Close-coupled self-priming centrifugal pump with electric motor

Characteristics

The J series self-priming centrifugal pumps are used in applications where a rapid priming capacity is required from demanding suction heights combined with the ability to transfer and manage polluted fluids, dirty and abrasives with suspended large diameter solids. The system is based on an inspectable pump casing which also acts as a water tank allowing a first quick priming without auxiliary systems, simplifying management of the system and reducing the time for maintenance. Within the physically permitted suction height limits, J pumps are a more comfortable and reliable solution than submersible pumps and vertical submersed impeller pumps.

Benefits

- 1) Rapid self-priming**
Without foot valve up to a height of 7.5 m (24.5 ft)
- 2) High resistance**
To abrasive liquids which are turbid and sandy
- 3) Semi-open impeller**
High thickness casting impact resistant

Applications

Industry:

clean, dirty, sandy, muddy, neutral, alkaline, acidic liquids; low viscous petroleum products, solvents even if dirty; milk of lime, caustic soda; washing, cooling, recirculation, smoke scrubbing.

Treatment:

pumping polluted corrosive wastewater containing sand, mud or solids in suspension; dosing neutralizing liquids; pumping out settled sludge.

Naval:

loading and unloading; bilge pumping; washing, fire-fighting, stripping, sanitary duty and circulation.

Agriculture:

surface irrigation; liquid manure oxygenation; transfer and spraying liquid manure or fertilizers; distribution of liquid animal feed; transfer of wine must; washing.

Varisco S.r.l. has certified its Quality, Environment and Safety Management System in accordance with the requirements of the international standard ISO 9001-14001-45001, recognized by the Lloyd Register.

JE 2-100 G10 NT21


Performance Curves

Test according to **UNI EN ISO 9906 standard - level 2B**
 Test liquid: **clean water, density 1.000 kg/m³** Spherical
 solids handling: **D.17 mm (0.67")**


Priming time 3.450 rpm: **20s from 1,5 m (5 ft)**
 Installed power: **1.5 kW - 2 HP**

Noise curve


dB(A)=max noise level at 1 m

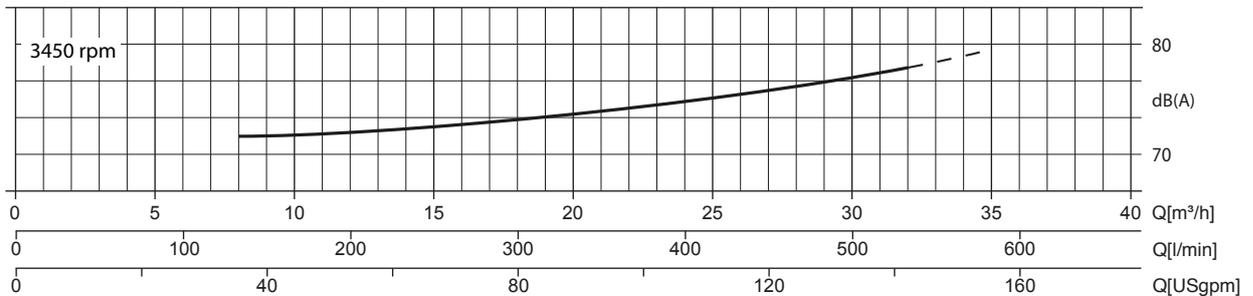

Multiple speed curve

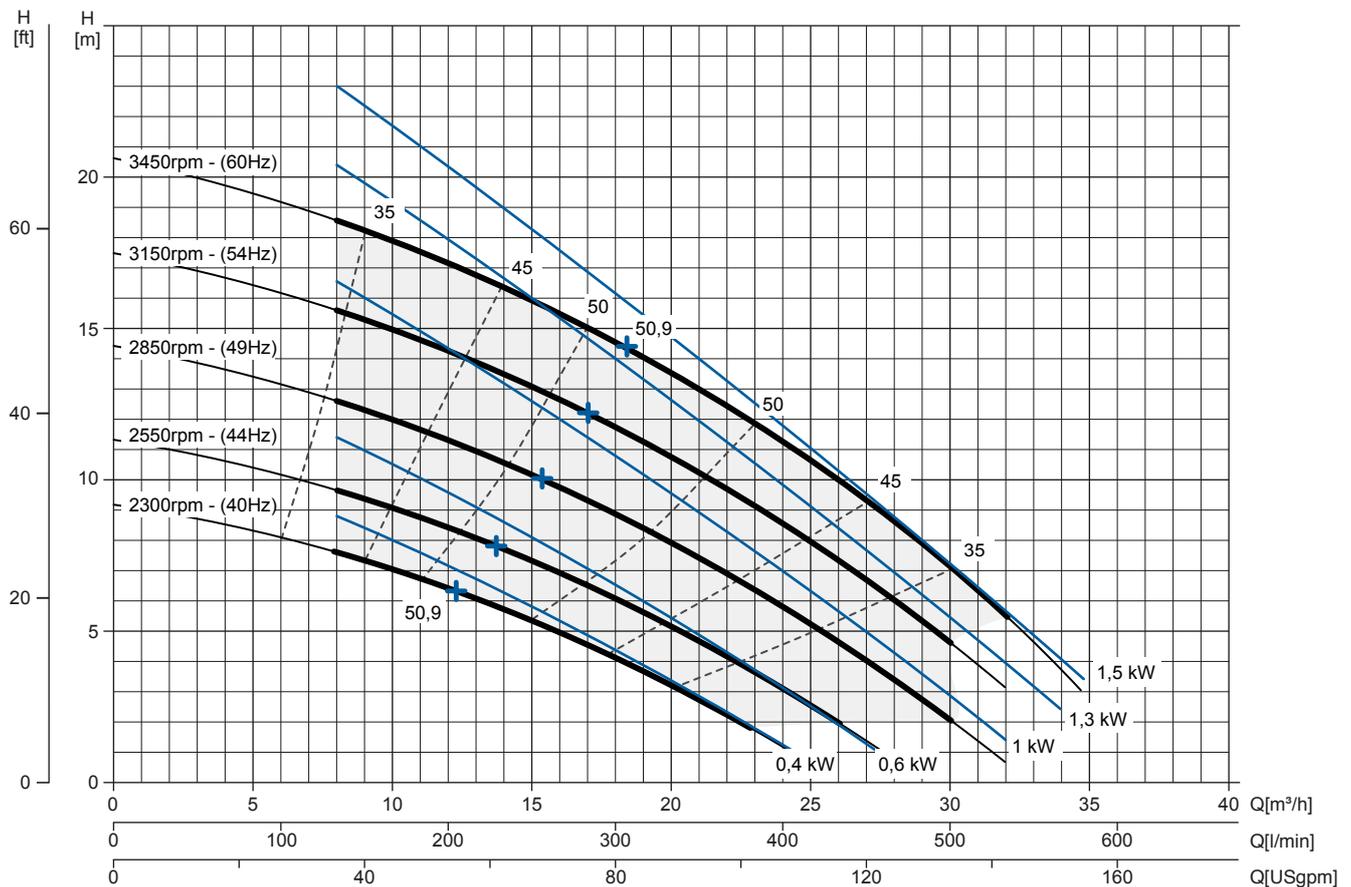

NPSHr Curve

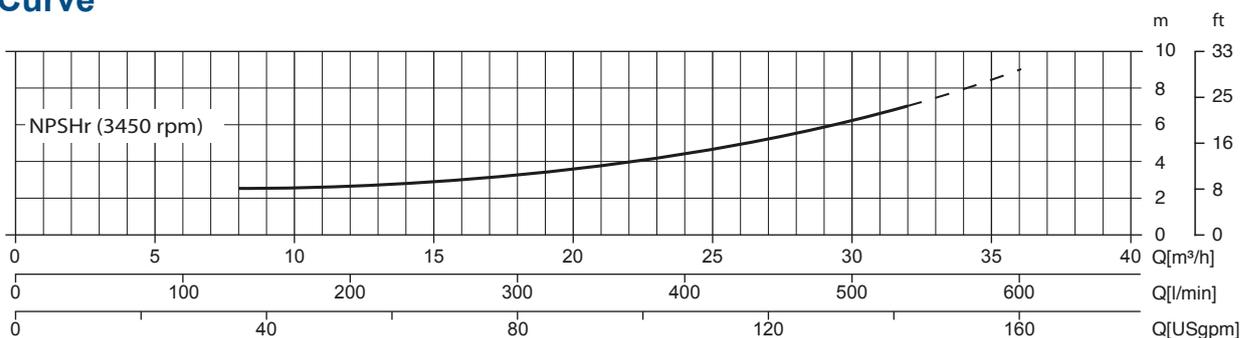

JE 2-100 G10 NT21

TECHNICAL DATA

Pump

Pump model	J 2-100 G10
Qmax [3.450 rpm]	36 m³/h - 600 l/min (158 USgpm)
Hmax [3.450 rpm]	20 m (65 ft)
Suction port	Threaded - 2" ISO 228 (BSP)
Delivery port	Threaded - 2" ISO 228 (BSP)
Impeller type	Semi-open. 3 vanes
Solids handling	17 mm (0.67")
Casing	EN 1561 EN-GJL-200 cast iron
Impeller	EN 1561 EN-GJL-200 cast iron
Non-return valve	Check-valve. NBR
Shaft	C45E EN steel
Mechanical seal	Silicon carbide/Ceramic
Elastomers	NBR
Lubrication	Grease

Motor

Mains supply (Three-phase)	220 VD/380 VY ± 5%	230 VD/400 VY ± 10%	240 VD/415 VY ± 5%	260 VD/460 VY ± 10%	280 VD/480 VY ± 5%
Frequency (Nominal speed)	50 Hz ± 3% / 2.900 rpm			60 Hz ± 3% / 3.450 rpm	
Absorbed current	5.57/3.22 A	5.52/3.17 A	5.5/3.18 A	4.87/2.75 A	4.76/2.78 A
Starting Current Is/In	6.5	7	7.5	8.4	8.6
Efficiency (100%)	84.2% (IE3)	84.2% (IE3)	84.2% (IE3)	85.5% (IE3)	85.5% (IE3)
Model	WEG W22 Premium				
Standards	IEC 60034-1				
Construction	Cast iron. TEFC				
Mounting arrangement	IM 2101 B34				
No. poles	2				
Rated power	1.5 kW - 2 HP				
Degree of protection	IP55				
Markings	CE. UL. CSA. EAC				
Insulation class/Temperature	F/80°K				
Duty type	Continuous - S1 Variable - suitable for inverter use (30-60 Hz)				
Temperature sensors	PTC, available as option				

Arrangement

Model	Close-coupled N
Dimensions	264 x 524 x 206 mm (10.41 x 20.62 x 8.09")
Painting	Polyurethan enamel, average thickness of 100 µm
Color	RAL 5010 blue (standard)
Features	Close-coupled with rigid coupling "N"
Height connection	0.16 m (0.50 ft)

Options

Automatic mechanical seal greaser	Cod. 10008316
Integrated VSD motor inverter	Available by 2021


Weight

Net weight	40 kg (88 lb)
------------	---------------

JE 2-100 G10 NT21

DIMENSIONS

mm [in]

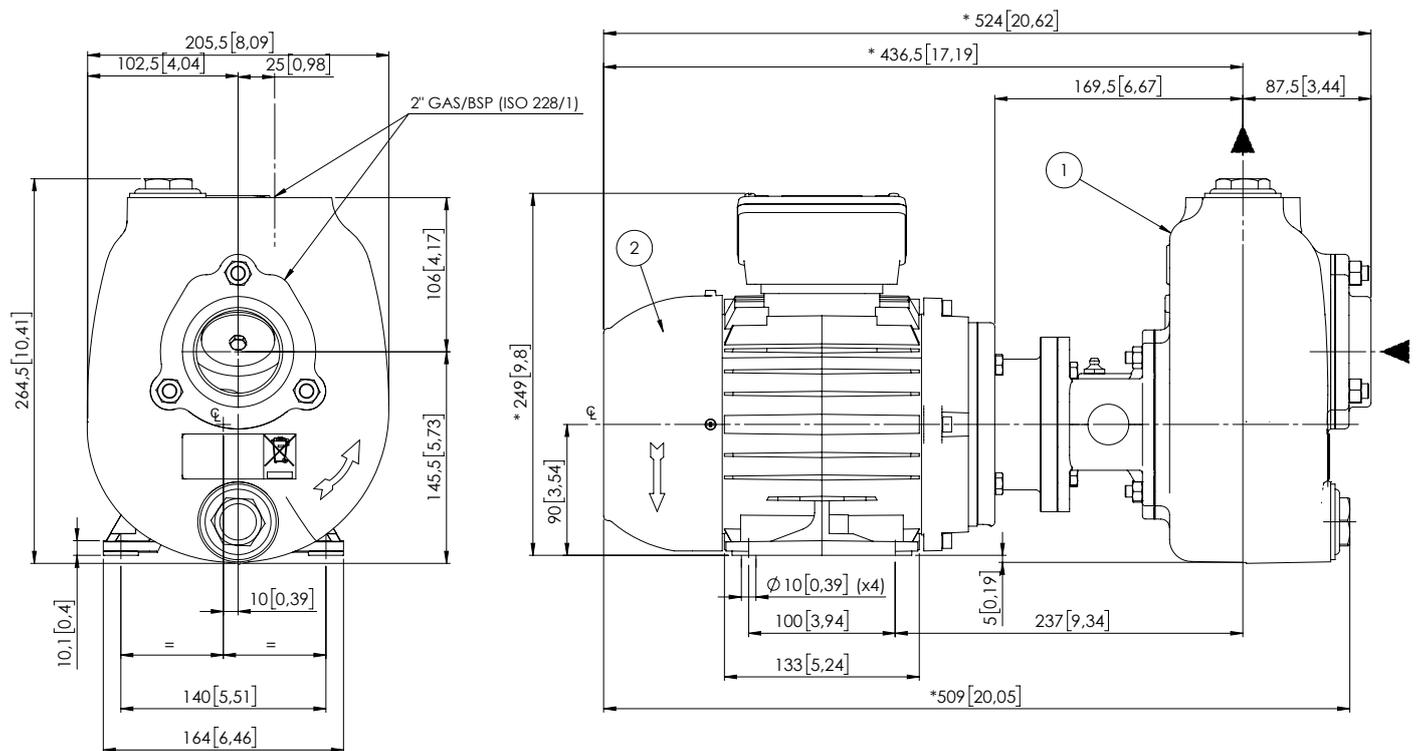

PACKAGING DIMENSIONS

Dimensions

JE 2-100 G10 NT21 (L x W x H mm)

720 x 270 x 480 + BOX

Gross weight (pump + packing)

51 Kg

